


BEEZAASAN EXPLOTECH PVT LTD

THINK POWER THINK US



BEEZAASAN®

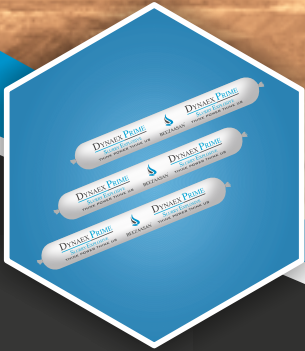

HO OFFICE : Opp to LIC Office, Palace Road Himmatnagar (Gujarat)

FACTORY ADDRESS : Village : Bhanthala – Felsani,

Taluka : Balasinor Dist : Mahisagar (Gujarat)



www.beezaasan.in



02772-246001, 240507, 248139

info@beezaasan.in | sales@beezaasan.in

BEEZAASAN EXPLOTECH PVT LTD



EXPLOSIVES PRODUCTS

DYNAEX PRIME - 1365



Dynaex Prime Is Large Dia cap sensitive Slurry Explosive which is used in Open Cast Mining and Quarrying Purpose.

TECHNICAL SPECIFICATION :

Density	:	1.15 -1.20
Detonation velocity (m/s)	:	4000 ± 200
Strength AWS AL/GR	:	1000 ± 200
DIA MM	:	83/125
Water Resistance	:	Excellent

DYNAEX Boost - 1366




Dynaex Boost Is Large Dia cap sensitive Slurry Explosive which is used in Open Cast Mining and Quarrying Purpose.

TECHNICAL SPECIFICATION :

Density	:	1.15 -1.20
Detonation velocity (m/s)	:	4400 ± 200
Strength AWS AL/GR	:	1000 ± 200
DIA MM	:	83/125
Water Resistance	:	Excellent

DYNAEX BLAST -1364



Dynaex Blast Is Large Dia cap sensitive Slurry Explosive which is used in Open Cast Mining and Quarrying Purpose.

TECHNICAL SPECIFICATION :

Density	:	1.15 -1.18
Detonation velocity (m/s)	:	4200 ± 200
Strength AWS AL/GR	:	1000 ± 200
DIA MM	:	83/125
Water Resistance	:	Excellent

DYNAEX SHAKTI - 1367



Dynaex Shakti Is Large Dia cap sensitive Slurry Explosive which is used in Open Cast Mining and Quarrying Purpose.

TECHNICAL SPECIFICATION :

Density	:	1.12-1.18
Detonation velocity (m/s)	:	3800 ± 200
Strength AWS AL/GR	:	1000 ± 200
DIA MM	:	83/125
Water Resistance	:	Excellent

DYNAEX COLUMN - 1363



Dynaex Column Is Large Dia non cap sensitive Slurry Explosive which is used in Open Cast Mining and Quarrying Purpose.

TECHNICAL SPECIFICATION :

Density	:	1.18 -1.25
Detonation velocity (m/s)	:	3600 ± 200
Strength AWS AL/GR	:	1000 ± 200
DIA MM	:	83/125
Water Resistance	:	Excellent



DYNAEX PRIME

SLURRY EXPLOSIVE

Dynaex Prime is a powerful cap sensitive and ammonium nitrate based gel slurry explosive which is used in surface Mining & Quarry blasting operations. It effectively boosts non cap sensitive explosives as well as ANFO. Its gel consistency and high loading density provides maximum energy to blast the surrounding rocks. Its unique packaging provides water resistance and high degree of safety against mechanical impacts and friction. Due to the water compatibility, the cartridge explosives with utmost ease in watery boreholes.

CORE STRENGTHS :

- Usage in multipurpose blasting operation.
- Easy to handle
- Consistency of package ensures
- Low vibration and less fly rock.
- Superior water resistance providing reliability in watery strata.
- Optimum strength, density & less noxious fumes
- Enhanced safety against mechanical impact and friction.
- Ease of priming and good coupling

APPLICATION :

- It is meant for use in medium and hard strata.
- Best suited for blasting various rock formations in mining operations, road cutting, canal excavation, and civil use.
- The product is powerful primers for initiating all non-cap sensitive explosives in hard rock formations and gravel extraction.



TECHNICAL CHARACTERISTICS

Density	1.15 -1.20
Detonation velocity (m/s)	4000 ± 200
Strength AWS AL / GR	1000 ± 200
DIA MM	83/125/200
Water Resistance	Excellent
Sensitivity	Cap Sensitive

*These Specification Can Be Changed Without Any Notice / Intimation

STANDARD PACKAGING

CARTRIDGE DIAMETER	CARTRIDGE WEIGHT	NO OF CARTRIDGES PER CASE OF 25 KG
83MM	2.78 KG	9 Nos
125MM	6.25 KG	4 Nos
200MM	12.5 KG	2 Nos

PACKAGING :

Packed in sturdy polythene bags clipped with aluminum clips. These cartridges are packed in corrugated fiber boxes. Net weight of each explosive packed box is 25 kgs.

WARNING & DISCLAIMER :

Use of these products by anyone who lacks adequate training experience & supervision may kill or injure. Beezaasan Explotech Pvt Ltd. Shall not be liable for any damage, whatever its nature may be, and including incidental consequential and indirect damage caused to buyers or third parties, directly or indirectly arising from or relating to the supply, use, processing, storage, sale or distribution of the products, arising after delivery unless caused by Beezaasan Explotech Pvt Ltd. wilful misconduct or gross negligence.



DYNAEX BOOST

SLURRY EXPLOSIVE


Dynaex Boost is high strength large dia cap sensitive and ammonium nitrate based gel slurry explosive. It provides high detonation velocity which gives effective performance in blasting medium to hard strata formations and is admired for effectively use in surface Mining & Quarry blasting operations. Its unique packaging offers high degree of safety from mechanical impacts, friction and gives high resistance of water and optimum fragmentation. Dynaex Boosts are placed where additional breaking energy is required.

CORE STRENGTHS :

- It has excellent water resistance.
- It tends to be non toxic relatively safe and easy to use
- It is suitable for all strata conditions including hard rock.
- It also provides considerable reduction in noxious fumes and thus eliminates headache complaints.
- Highly flexible operations and simple to adopt and implement.
- High strength and high density.
- It effectively boosts non cap sensitive explosive as well as ANFO.
- It has high detonating velocity thus provides optimum fragmentation.

APPLICATION :

- It is meant for use in medium and hard strata.
- Best suited for blasting various rock formations in mining operations, road cutting, canal excavation, and civil use.
- The product is powerful primers for initiating all non-cap sensitive explosives in hard rock formations and gravel extraction.

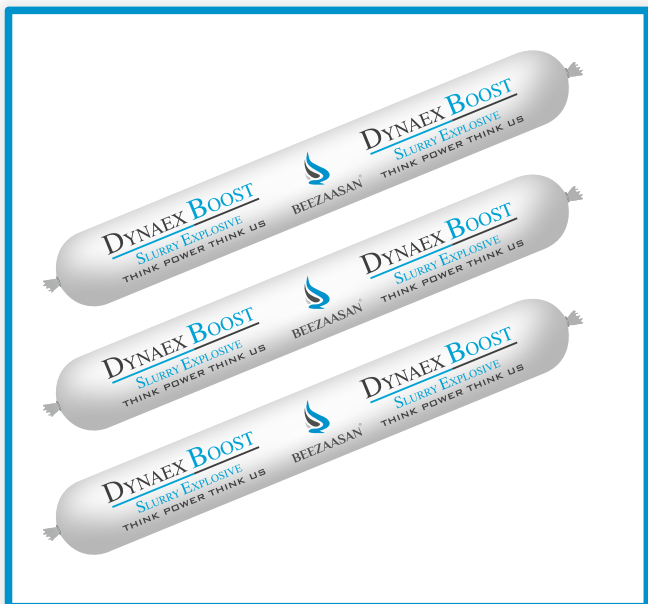

PACKAGING :

Packed in sturdy polythene bags clipped with aluminum clips. These cartridges are packed in corrugated fiber boxes. Net weight of each explosive packed box is 25 kgs.

WARNING & DISCLAIMER :

Use of these products by anyone who lacks adequate training experience & supervision may kill or injure. Beezaasan Explotech Pvt Ltd. Shall not be liable for any damage, whatever its nature may be, and including incidental consequential and indirect damage caused to buyers or third parties, directly or indirectly arising from or relating to the supply, use, processing, storage, sale or distribution of the products, arising after delivery unless caused by Beezaasan Explotech Pvt Ltd. wilful misconduct or gross negligence.

TECHNICAL CHARACTERISTICS

Density	1.15 -1.20
Detonation velocity (m/s)	4400 ± 200
Strength AWS AL / GR	1000 ± 200
DIA MM	83/125/200
Water Resistance	Excellent
Sensitivity	Cap Sensitive

*These Specification Can Be Changed Without Any Notice / Intimation

STANDARD PACKAGING

CARTRIDGE DIAMETER	CARTRIDGE WEIGHT	NO OF CARTRIDGES PER CASE OF 25 KG
83MM	2.78 KG	9 Nos
125MM	6.25 KG	4 Nos
200MM	12.5 KG	2 Nos



DYNAEX BLAST

SLURRY EXPLOSIVE

Dynaex Blast is most powerful and high strength large dia cap sensitive aluminized gel slurry explosive. Best suited for blasting hard strata formation and is admired for effectively use in surface Mining & Quarry blasting operations. Its unique packaging offers high degree of safety from mechanical impacts, friction and gives high resistance of water and optimum fragmentation. It effectively boosts non cap sensitive explosive as well as ANFO.

CORE STRENGTHS :

- Excellent water resistance
- High performance
- Non toxic
- Consistency of package ensures
- Easy to handle
- Optimum fragmentation
- Low vibration and flyrock
- Effectively boosts non cap sensitive explosive as well as ANFO.

APPLICATION :

- Best suited for blasting various rock formations in coal, iron ore, copper, bauxite, limestone and other mining operations, road cutting, canal excavation, and civil use.
- The product is powerful primers for initiating all non-cap sensitive explosives in hard rock formations.



TECHNICAL CHARACTERISTICS

Density	1.15 -1.18
Detonation velocity (m/s)	4200 ± 200
Strength AWS AL / GR	1000 ± 200
DIA MM	83/125/200
Water Resistance	Excellent
Sensitivity	Cap Sensitive

*These Specification Can Be Changed Without Any Notice / Intimation

STANDARD PACKAGING

CARTRIDGE DIAMETER	CARTRIDGE WEIGHT	NO OF CARTRIDGES PER CASE OF 25 KG
83MM	2.78 KG	9 Nos
125MM	6.25 KG	4 Nos
200MM	12.5 KG	2 Nos

PACKAGING :

Packed in sturdy polythene bags clipped with aluminum clips. These cartridges are packed in corrugated fiber boxes. Net weight of each explosive packed box is 25 kgs.

WARNING & DISCLAIMER :

Use of these products by anyone who lacks adequate training experience & supervision may kill or injure. Beezaasan Explotech Pvt Ltd. Shall not be liable for any damage, whatever its nature may be, and including incidental consequential and indirect damage caused to buyers or third parties, directly or indirectly arising from or relating to the supply, use, processing, storage, sale or distribution of the products, arising after delivery unless caused by Beezaasan Explotech Pvt Ltd. wilful misconduct or gross negligence.



DYNAEX SHAKTI

SLURRY EXPLOSIVE

Dynaex Shakti is medium strength large dia cap sensitive and ammonium nitrate based gel slurry explosive. It provides high detonation velocity which gives effective performance in blasting medium to hard strata formations and is admired for effectively use in surface Mining & Quarry blasting operations. Its unique packaging offers high degree of safety from mechanical impacts, friction and gives high resistance of water and optimum fragmentation. It effectively boosts non cap sensitive explosive as well as ANFO.

CORE STRENGTHS :

- Excellent water resistance
- High performance
- Non toxic and less noxious fumes
- Consistency of package ensures
- Easy to handle
- Good fragmentation
- Low vibration and fly rock
- Effectively boosts non cap sensitive explosive as well as ANFO

APPLICATION :

- It is meant for use in medium strata formations.
- The product is powerful primers for initiating all non-cap sensitive explosives in hard rock formations and gravel extraction.



TECHNICAL CHARACTERISTICS

Density	1.12 -1.18
Detonation velocity (m/s)	3800 ± 200
Strength AWS AL / GR	1000 ± 200
DIA MM	83/125/200
Water Resistance	Excellent
Sensitivity	Cap Sensitive

*These Specification Can Be Changed Without Any Notice / Intimation

STANDARD PACKAGING

CARTRIDGE DIAMETER	CARTRIDGE WEIGHT	NO OF CARTRIDGES PER CASE OF 25 KG
83MM	2.78 KG	9 Nos
125MM	6.25 KG	4 Nos
200MM	12.5 KG	2 Nos

PACKAGING :

Packed in sturdy polythene bags clipped with aluminum clips. These cartridges are packed in corrugated fiber boxes. Net weight of each explosive packed box is 25 kgs.

WARNING & DISCLAIMER :

Use of these products by anyone who lacks adequate training experience & supervision may kill or injure. Beezaasan Explotech Pvt Ltd. Shall not be liable for any damage, whatever its nature may be, and including incidental consequential and indirect damage caused to buyers or third parties, directly or indirectly arising from or relating to the supply, use, processing, storage, sale or distribution of the products, arising after delivery unless caused by Beezaasan Explotech Pvt Ltd. wilful misconduct or gross negligence.



DYNAEX COLUMN

SLURRY EXPLOSIVE

Dynaex Column is medium strength large dia non cap sensitive and ammonium nitrate based gel slurry explosive. It is a secondary explosive used in soft & medium rock formations for economical blasting with use of primary explosives. Its unique packaging offers high degree of safety from mechanical impacts, friction and gives high resistance of water and optimum fragmentation

CORE STRENGTHS :

- Excellent water resistance
- High performance
- Non toxic and less noxious fumes
- Consistency of package ensures
- Easy to handle
- Good fragmentation
- Low vibration and less fly rock

APPLICATION :

- It is meant for use in soft and medium strata formations like sedimentary rock.
- Provides high strength base charge with combination of primary explosives.



TECHNICAL CHARACTERISTICS

Density	1.18 -1.25
Detonation velocity (m/s)	3600 ± 200
Strength AWS AL / GR	1000 ± 200
DIA MM	83/125/200
Water Resistance	Excellent
Sensitivity	Non-Cap Sensitive

*These Specification Can Be Changed Without Any Notice / Intimation

STANDARD PACKAGING

CARTRIDGE DIAMETER	CARTRIDGE WEIGHT	NO OF CARTRIDGES PER CASE OF 25 KG
83MM	2.78 KG	9 Nos
125MM	6.25 KG	4 Nos
200MM	12.5 KG	2 Nos

PACKAGING :

Packed in sturdy polythene bags clipped with aluminum clips. These cartridges are packed in corrugated fiber boxes. Net weight of each explosive packed box is 25 kgs.

WARNING & DISCLAIMER :

Use of these products by anyone who lacks adequate training experience & supervision may kill or injure. Beezaasan Explotech Pvt Ltd. Shall not be liable for any damage, whatever its nature may be, and including incidental consequential and indirect damage caused to buyers or third parties, directly or indirectly arising from or relating to the supply, use, processing, storage, sale or distribution of the products, arising after delivery unless caused by Beezaasan Explotech Pvt Ltd. wilful misconduct or gross negligence.

BEEZAASAN EXPLOTECH PVT LTD

THINK POWER THINK US

The Only Leading Explosive Manufacturer of Gujarat



BEEZAASAN[®]

DYNAEX PRIME



Density : 1.15 -1.20
VOD (m/s) : 4000±200
Strength AWSAL/GR : 1000±200

DYNAEX BOOST



Density : 1.15 -1.20
VOD (m/s) : 4400±200
Strength AWSAL/GR : 1000±200

DYNAEX BLAST



Density : 1.15 -1.18
VOD (m/s) : 4200±200
Strength AWSAL/GR : 1000±200

DYNAEX SHAKTI



Density : 1.12 -1.18
VOD (m/s) : 3800±200
Strength AWSAL/GR : 1000±200

DYNAEX COLUMN



Density : 1.18 -1.25
VOD (m/s) : 3600±200
Strength AWSAL/GR : 1000±200

- Products Have Excellent Water Resistance
- The Products Size is 83mm



www.beezaasan.in



info@beezaasan.in | sales@beezaasan.in

02772-246001, 240507, 248139

HO OFFICE : Opp to LIC Office, Palace Road Himmatnagar (Gujarat)

FACTORY ADDRESS : Village: Bhanthala – Felsani,

Taluka : Balasinor **Dist:** Mahisagar (Gujarat)