



BEEZAASAN®



THINK POWER THINK US

**The Only Leading Explosive
Manufacturer of Gujarat**



CORPORATE OFFICE : Opp to LIC Office, Palace Road, Himmatnagar, **Dist :** Sabarkantha (Gujarat) India - 383001

FACTORY ADDRESS : Village : Bhanthala - Felsani, **Taluka :** Balasinor, **Dist :** Mahisagar (Gujarat) India - 388255



02772-246001 / 240507 / 248139



info@beezaasan.in / tss@beezaasan.in



www.beezaasan.in





EXPLOSIVES PRODUCTS

DYNAEX POWER - 80



Dynaex Power - 80 is a Non Permitted Small Diameter Cap Sensitive Emulsion Explosive Specially Designed for blasting in Metalliferous Mines , Tunneling , Well Sinking , Quarrying , Excavation , Road Construction etc.

TECHNICAL SPECIFICATION :


Density	:	1.20 ± 0.05
Detonation velocity (m/s)	:	5500 ± 200
Strength AWS AL/GR	:	1000 ± 200
DIA MM	:	25/32/40/50
Water Resistance	:	Excellent

Dynaex Power - 90 is a Non Permitted Small Diameter Cap Sensitive Emulsion Explosive Specially Designed for blasting in Metalliferous Mines , Tunneling , Well Sinking , Quarrying , Excavation , Road Construction etc.

TECHNICAL SPECIFICATION :

Density	:	1.20 ± 0.05
Detonation velocity (m/s)	:	6000 ± 200
Strength AWS AL/GR	:	1000 ± 200
DIA MM	:	25/32/40/50
Water Resistance	:	Excellent

DYNAEX POWER - 90



DYNAEX PRIME - E



Dynaex Prime - E is a Non Permitted Large Diameter Cap Sensitive Emulsion Explosive Specially Designed for blasting in Metalliferous Mines , Tunneling , Well Sinking , Quarrying , Excavation , Road Construction etc.

TECHNICAL SPECIFICATION :


Density	:	1.20 ± 0.05
Detonation velocity (m/s)	:	6200 ± 200
Strength AWS AL/GR	:	1000 ± 200
DIA MM	:	50/60/63/75/83/100/125
Water Resistance	:	Excellent

Dynaex Boost - E is a Non Permitted Large Diameter Cap Sensitive Emulsion Explosive Specially Designed for blasting in Metalliferous Mines , Tunneling , Well Sinking , Quarrying , Excavation , Road Construction etc

TECHNICAL SPECIFICATION :

Density	:	1.20 ± 0.05
Detonation velocity (m/s)	:	6500 ± 200
Strength AWS AL/GR	:	1000 ± 200
DIA MM	:	50/60/63/75/83/100/125
Water Resistance	:	Excellent

DYNAEX BOOST - E





DYNAEX POWER - 80

EMULSION EXPLOSIVE

Dynaex Power - 80 is a Non Permitted Small Diameter Cap Sensitive Emulsion Explosive Specially Designed for blasting in Metalliferous Mines , Tunneling , Well Sinking , Quarrying , Excavation , Road Construction etc.

CORE STRENGTHS :

- Usage in multipurpose blasting operation.
- Easy to handle and loading of holes.
- Consistency of package ensures.
- Low Vibration and less fly rock.
- Superior water resistance providing reliability in watery strata.
- Optimum strength, density & less noxious fumes
- Enhanced safety against mechanical impact and friction.
- Priming and coupling made easy

APPLICATION :


- It is meant for use in medium and hard strata.
- Best suited for blasting various rock formations in Mining Operations, Road Cutting, Canal Excavation, and Civil use.

TECHNICAL CHARACTERISTICS

Density	1.20±0.05
Detonation velocity (m/s)	5500±200
Strength AWS AL / GR	1000±200
DIA MM	25/32/40/50
Water Resistance	Excellent
Sensitivity	Cap Sensitive

*These Specification Can Be Changed Without Any Notice / Intimation

CARTRIDGE DIAMETER	CARTRIDGE WEIGHT	NO OF CARTRIDGES PER CASE OF 25 KG
25	125	200
32	185	135
40	390	64
50	625	40

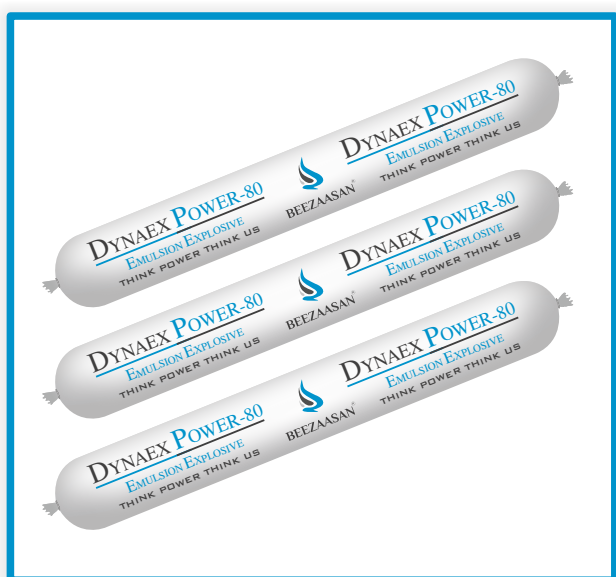

SHIPPING INFORMATION :

Class/Division 1 /1.1; Group D, UN No. , : 0241 | Page No. 1120, Stowage Cat II Type B

PACKAGING :

Packed in sturdy polythene bags clipped with Aluminum clips. These Cartridges are packed in corrugated fiber boxes. Net weight of each Explosive packed box is 25 kgs.

WARNING & DISCLAIMER :

Use of these products by anyone who lacks adequate training experience & supervision may kill or injure. Beezaasan Explotech Pvt Ltd. Shall not be liable for any damage, whatever its nature may be, and including incidental consequential and indirect damage caused to buyers or third parties, directly or indirectly arising from or relating to the supply, use, processing, storage, sale or distribution of the products, arising after delivery unless caused by Beezaasan Explotech Pvt Ltd. wilful misconduct or gross negligence.



DYNAEX POWER - 90

EMULSION EXPLOSIVE

Dynaex Power - 90 is a Non Permitted Small Diameter Cap Sensitive Emulsion Explosive Specially Designed for blasting in Metalliferous Mines , Tunneling , Well Sinking , Quarrying , Excavation , Road Construction etc.

CORE STRENGTHS :

- Usage in multipurpose blasting operation.
- Easy to handle and loading of holes.
- Consistency of package ensures.
- Low Vibration and less fly rock.
- Superior water resistance providing reliability in watery strata.
- Optimum strength, density & less noxious fumes
- Enhanced safety against mechanical impact and friction.
- Priming and coupling made easy

APPLICATION :


- It is meant for use in hard strata.
- Best suited for blasting various rock formations in Mining Operations, Road Cutting, Canal Excavation, and Civil use.

TECHNICAL CHARACTERISTICS

Density	1.20±0.05
Detonation velocity (m/s)	6000±200
Strength AWS AL / GR	1000±200
DIA MM	25/32/40/50
Water Resistance	Excellent
Sensitivity	Cap Sensitive

*These Specification Can Be Changed Without Any Notice / Intimation

CARTRIDGE DIAMETER	CARTRIDGE WEIGHT	NO OF CARTRIDGES PER CASE OF 25 KG
25	125	200
32	185	135
40	390	64
50	625	40

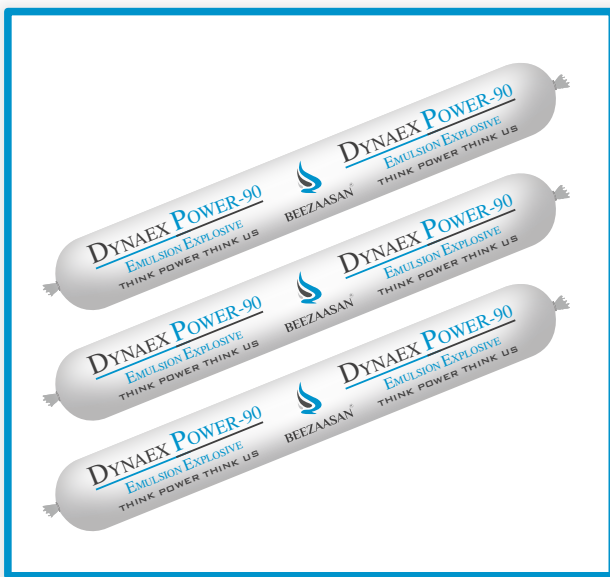

SHIPPING INFORMATION :

Class/Division 1 /1.1; Group D, UN No. , : 0241 | Page No. 1120, Stowage Cat II Type B

PACKAGING :

Packed in sturdy polythene bags clipped with Aluminum clips. These Cartridges are packed in corrugated fiber boxes. Net weight of each Explosive packed box is 25 kgs.

WARNING & DISCLAIMER :

Use of these products by anyone who lacks adequate training experience & supervision may kill or injure. Beezaasan Explotech Pvt Ltd. Shall not be liable for any damage, whatever its nature may be, and including incidental consequential and indirect damage caused to buyers or third parties, directly or indirectly arising from or relating to the supply, use, processing, storage, sale or distribution of the products, arising after delivery unless caused by Beezaasan Explotech Pvt Ltd. wilful misconduct or gross negligence.



DYNAEX PRIME - E

EMULSION EXPLOSIVE

Dynaex Prime - E is a Non Permitted Large Diameter Cap Sensitive Emulsion Explosive Specially Designed for blasting in Metalliferous Mines , Tunneling , Well Sinking , Quarrying , Excavation , Road Construction etc.

CORE STRENGTHS :

- Usage in multipurpose blasting operation.
- Easy to handle and loading of holes.
- Consistency of package ensures.
- Low Vibration and less fly rock.
- Superior water resistance providing reliability in watery strata.
- Optimum strength, density & less noxious fumes
- Enhanced safety against mechanical impact and friction.
- Priming and coupling made easy

APPLICATION :

- It is meant for use in hard strata.
- Best suited for blasting various rock formations in Mining Operations, Road Cutting, Canal Excavation, and Civil use.

TECHNICAL CHARACTERISTICS

Density	1.20±0.05
Detonation velocity (m/s)	6200±200
Strength AWS AL / GR	1000±200
DIA MM	50/60/63/75/83/100/125
Water Resistance	Excellent
Sensitivity	Cap Sensitive

*These Specification Can Be Changed Without Any Notice / Intimation

CARTRIDGE DIAMETER	CARTRIDGE WEIGHT	NO OF CARTRIDGES PER CASE OF 25 KG
50	625	40
60	1560	16
63	2080	12
75	2270	11
83	2780	9
100	3130	8
125	6250	4



SHIPPING INFORMATION :

Class/Division 1 /1.1; Group D, UN No. : 0241 | Page No. 1120, Stowage Cat II Type B

PACKAGING :

Packed in sturdy polythene bags clipped with Aluminum clips. These Cartridges are packed in corrugated fiber boxes. Net weight of each Explosive packed box is 25 kgs.

WARNING & DISCLAIMER :

Use of these products by anyone who lacks adequate training experience & supervision may kill or injure. Beezaasan Explotech Pvt Ltd. Shall not be liable for any damage, whatever its nature may be, and including incidental consequential and indirect damage caused to buyers or third parties, directly or indirectly arising from or relating to the supply, use, processing, storage, sale or distribution of the products, arising after delivery unless caused by Beezaasan Explotech Pvt Ltd. wilful misconduct or gross negligence.



DYNAEX BOOST - E

EMULSION EXPLOSIVE

Dynaex Boost - E is a Non Permitted Large Diameter Cap Sensitive Emulsion Explosive Specially Designed for blasting in Metalliferous Mines , Tunneling , Well Sinking , Quarrying , Excavation , Road Construction etc.

CORE STRENGTHS :

- Usage in multipurpose blasting operation.
- Easy to handle and loading of holes.
- Consistency of package ensures.
- Low Vibration and less fly rock.
- Superior water resistance providing reliability in watery strata.
- Optimum strength, density & less noxious fumes
- Enhanced safety against mechanical impact and friction.
- Priming and coupling made easy

APPLICATION :

- It is meant for use in hard strata.
- Best suited for blasting various rock formations in Mining Operations, Road Cutting, Canal Excavation, and Civil use.

TECHNICAL CHARACTERISTICS

Density	1.20±0.05
Detonation velocity (m/s)	6500±200
Strength AWS AL / GR	1000±200
DIA MM	50/60/63/75/83/100/125
Water Resistance	Excellent
Sensitivity	Cap Sensitive

*These Specification Can Be Changed Without Any Notice / Intimation

CARTRIDGE DIAMETER	CARTRIDGE WEIGHT	NO OF CARTRIDGES PER CASE OF 25 KG
50	625	40
60	1560	16
63	2080	12
75	2270	11
83	2780	9
100	3130	8
125	6250	4



SHIPPING INFORMATION :

Class/Division 1 /1.1; Group D, UN No. , : 0241 | Page No. 1120, Stowage Cat II Type B

PACKAGING :

Packed in sturdy polythene bags clipped with Aluminum clips. These Cartridges are packed in corrugated fiber boxes. Net weight of each Explosive packed box is 25 kgs.

WARNING & DISCLAIMER :

Use of these products by anyone who lacks adequate training experience & supervision may kill or injure. Beezaasan Explotech Pvt Ltd. Shall not be liable for any damage, whatever its nature may be, and including incidental consequential and indirect damage caused to buyers or third parties, directly or indirectly arising from or relating to the supply, use, processing, storage, sale or distribution of the products, arising after delivery unless caused by Beezaasan Explotech Pvt Ltd. wilful misconduct or gross negligence.





BEEZAASAN®



DYNAEX POWER-80

DYNAEX POWER-80
EMULSION EXPLOSIVE
THINK POWER THINK US

DYNAEX POWER-80
EMULSION EXPLOSIVE
BEEZAASAN

Density : 1.20±0.05
VOD (m/s) : 5500±200
Strength AWSAL/GR : 1000±200

- Products have excellent water resistance
- The products size is 25mm / 32mm / 40mm / 50mm / 60mm / 63mm / 75mm / 83mm / 100mm / 125mm

DYNAEX POWER-90

DYNAEX POWER-90
EMULSION EXPLOSIVE
THINK POWER THINK US

DYNAEX POWER-90
EMULSION EXPLOSIVE
BEEZAASAN

Density : 1.20±0.05
VOD (m/s) : 6000±200
Strength AWSAL/GR : 1000±200

DYNAEX PRIME-E

DYNAEX PRIME-E
EMULSION EXPLOSIVE
THINK POWER THINK US

DYNAEX PRIME-E
EMULSION EXPLOSIVE
BEEZAASAN

Density : 1.20±0.05
VOD (m/s) : 6200±200
Strength AWSAL/GR : 1000±200

DYNAEX BOOST-E

DYNAEX BOOST-E
EMULSION EXPLOSIVE
THINK POWER THINK US

DYNAEX BOOST-E
EMULSION EXPLOSIVE
BEEZAASAN

Density : 1.20±0.05
VOD (m/s) : 6500±200
Strength AWSAL/GR : 1000±200



www.beezaasan.in



02772-246001 / 240507 / 248139



info@beezaasan.in / sales@beezaasan.in / tss@beezaasan.in